

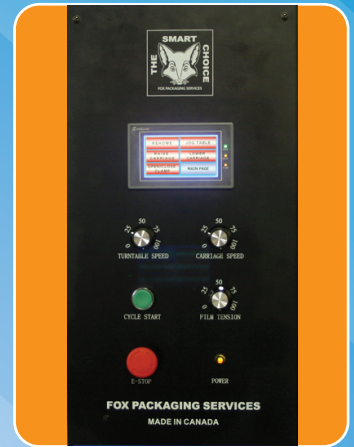


# FPS 300

HURRICANE THREAD® PRESTRETCH CARRIAGE

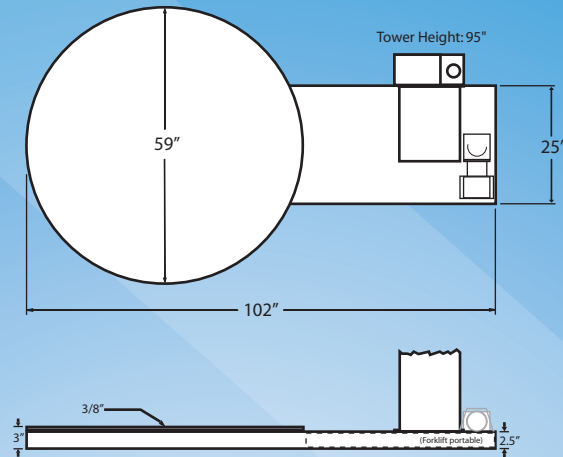

POWER DE-ENERGIZED  
WHEN CARRIAGE DOOR OPEN

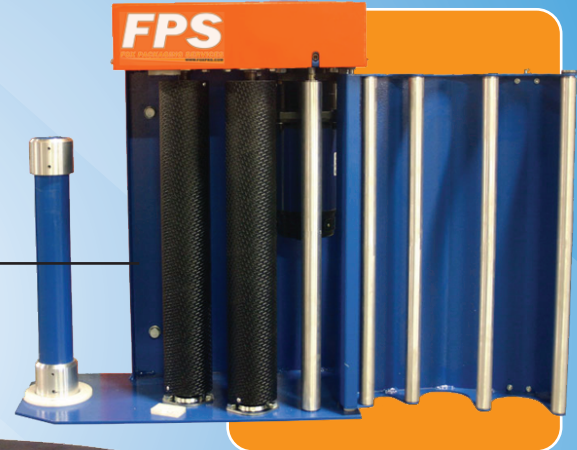

## SPECIFICATIONS:

### CONTROLS

#### PRODUCTION SPEED

PLC TOUCH SCREEN CONTROLS

1-40 LPH\*

#### LOAD SIZE

55"L x 55"W x 91"H (80" Diagonal)

#### WEIGHT CAPACITY

5000LBS

#### STRUCTURAL

WELDED STEEL CONSTRUCTION

#### TURNTABLE DRIVE

1/2HP SCR DRIVE, 20:1 GEARBOX

32 TABLE SUPPORT WHEELS

#### TURNTABLE SPEED

0-15RPM

#### CARRIAGE DRIVE

1/2HP SCR DRIVE, #50 ANSI CHAIN

#### FILM DELIVERY

HURRICANE THREAD® PRESTRETCH CARRIAGE

200% FACTORY SET PRESTRETCH

50-250% STRETCH AVAILABLE ON REQUEST

#### FILM ROLL

20" MACHINE FILM, 3" CORE

#### POWER REQ.

115VAC, 15A, 60Hz- PLUG AND PLAY

### SAFETY

**SAFEGUARD** FULLY GUARDED

TOWER & MOVING PARTS

NO PINCH: CARRIAGE DE-

ENERGIZED WHEN DOOR OPEN

EMERGENCY STOP BUTTON

### ONBOARD PROGRAMS

STANDARD WRAP CYCLE

STANDARD W/TOP COVER PAUSE

BOTTOM WRAPS FIRST

WRAP UPWARDS ONLY

### OPTIONS

HEIGHT/BASE EXTENSION

LOADING RAMP

HEAVY DUTY EXTENDED RAMP

(For powered hand trucks)

INTEGRATED SCALE PACKAGE