# HIGH SPEED DP

### WITH INTEGRATED CASE ERECTOR





**2-EZ®HS DP**Drop Packer with Integrated Case Erector

The well proven capabilities of the Combi DP Drop Packer have been enhanced with a higher level of efficiency. Integrated into the frame of this state-of-the-art case packer is our side belt driven Combi 2-EZ° SB or 2-EZ° HS high speed case erectors. Now an even larger variety of product sizes, shapes, weights and materials can be quickly and easily packed in large cases at speeds up to 20 cpm, while still maintaining a compact footprint.

As with all our drop packers, changeovers are simplified with adjustable lane guides with clamping shaft collars and pointers and scales, giving the user the flexibility to pack multiple products on the same line.

# 2-EZ®HS/SB DP

### FEATURES AND SPECIFICATIONS:

- Heavy-Duty Welded tubular steel frame with lifetime guarantee
- EZ load walk-in powered case magazine
- Self-cleaning vacuum system with air purge
- Right hand or left hand execution
- 3-Stage erection process with VFD drive
- Heavy-duty case lift assembly with powered case discharge
- Stainless steel contact parts and product guides
- Allen-Bradley<sup>™</sup> electrical PLC control and OIT
- Dual belt drive case sealing
- Lockout / Tagout Safety Disconnect
- 3M<sup>™</sup> Accuglide<sup>™</sup> High Speed 2" Tapehead
- Guarding with hinged doors and safety interlocks
- 15" wide mat-top chain product conveyor

### **ELECTRICAL SERVICE:**

• 240v/3 PH/60 Hz, 40-60 amp disconnect

### **AIR CONSUMPTION:**

• 80 psi, consumes approximately 15 cfm

|--|

## MULTI-LANE DIVERTER (OPTIONAL)


The new servo driven Combi Product Diverter counts and indexes product from one lane up to 8 individual lanes, while maintaining orientation and constant product flow.

- Diverts up to 240 containers per minute
- Used primarily for non-round bottles and cans
- Safe shifting "anti-jam" design
- No-tool adjustments
- Also available as free standing unit over existing conveyor

MODEL	CASE SIZE MIN	CASE SIZE MAX	SPEED:
	(LXWXH)	(LXWXH)	CPM*
2-EZ° SB DP	8 x 6 x 5"	24 x 16 x 18"	8-20" Long 15 cpm
	(203x152x127mm)	(610x406x457mm)	20-24" Long 12 cpm
2-EZ <sup>®</sup> HS DP	8 x 6 x 5" (203x152x127mm)	24 x 16 x 18" (610x406x457mm)	20

\* System speeds vary depending on product, pack patterns and case size

### **DISTRIBUTED BY:**

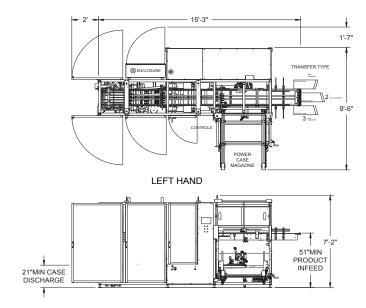



6299 Dressler Rd NW North Canton, OH 44720 Phone: 1-800-521-9072 www.combi.com